


1. Transmitter

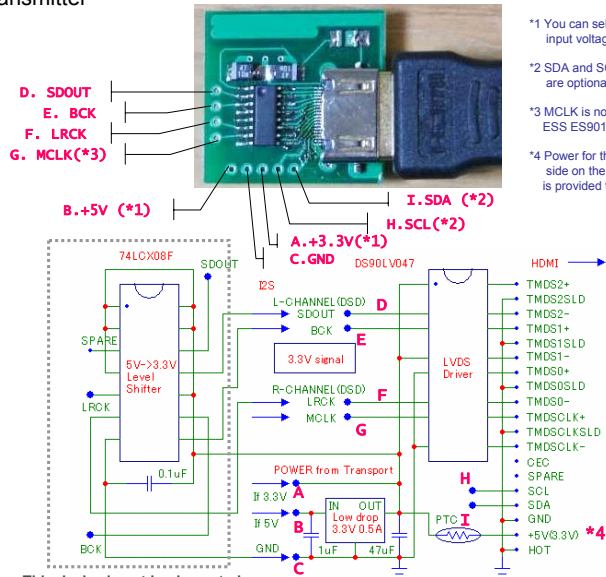

*1 You can select one of power input voltage +5 V or +3.3 V.

*2 SDA and SCL for I2C are optional.

*3 MCLK is not required for ESS ES9018.

*4 Power for the transmitter side on the receiver isolator is provided through this line.